

Editor - <http://www.quantlet.org/m...>


Output/Result

```
x=matrix(rows(x))~x[,2]
;
beta=glm(x, y)
d=x[,2]~y
line=min(x[,2])|max(x[,2])
m=line~(((1|1)~line)*beta)
setmaskl(m, (1: rows(m))',
setmaskp(d,4,3,8)
setmaskp(m, 0, 0, 0)
;
```

di



pullovers data

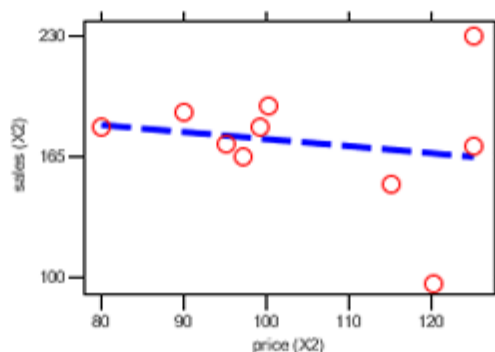

Client